


## ARD Series

**A range of high quality power supplies from CDVI to compliment your access control and locking requirements.**

The power supplies are available in different models, providing 12V and 24Vac and/or dc, with options of the current available.

The ARD series are regulated power supplies, with full stated current to load - meaning they will deliver all the current they say they will. They are fuse protected on both the primary and secondary circuits, and being constructed of polycarbonate they are extremely safe, making them ideal for powering external gate locks or magnets.

The ARD12T includes a timer and relay, very useful when requiring lock release time for a door which is only controlled by an exit button or similar.

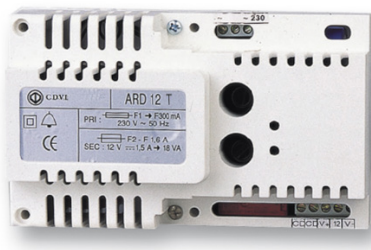

### Overview

- High quality
- Full current to load (ARD series)
- Regulated power supply (ARD series)
- Short circuit protection
- Built-in timer & relay (ARD12T)
- Excellent value
- 2 year warranty

## ARD Series - Technical Specifications

### Electrical Specifications

	<b>Voltage</b>	<b>Current</b>	<b>Relay</b>	<b>Timer</b>
<b>ARD12</b>	12Vac/dc	@12Vdc = 1A @12Vac = 0.35A	/	/
<b>ARD12T</b>	12Vdc	@12Vdc = 1A	COM/NO/NC Contacts	0.5 to 3.5 seconds adjustable
<b>ARD212</b>	12Vac/dc	@12Vdc = 1.5A @12Vac = 0.35A	/	/
<b>ARD24</b>	24Vdc	@24Vdc = 1A	/	/

### Dimensions

Dimensions: 142 x 92 x 60mm